


DIGITUS® HDMI High Speed

AK-330107-100-S

EAN 4016032307051

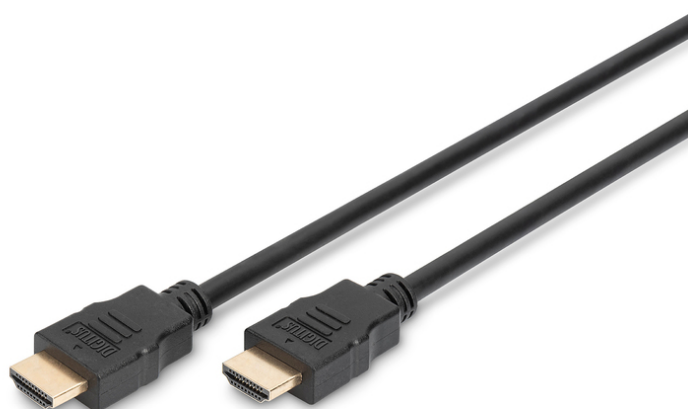

HDMI High Speed connection cable, type A M/M, 10.0m, HDMI 1.4, gold, bl

Digitus HDMI High Speed connection cable, type A M/M, 10.0m, HDMI 1.4, gold, black. This cable is designed for high-speed data transfer and is compatible with all HDMI 1.4 devices. It features gold-plated connectors to ensure reliable connections and is shielded to prevent interference. The cable is 10.0m long and is suitable for use in home theaters, offices, and other environments where high-quality video and audio are required.

- Supports 1080p @ 60 Hz
- Supports 3D
- Supports ARC (Audio Return Channel)
- Supports Lip-Sync (Lip-Sync Master/Slave)
- Supports Dolby TrueHD
- Supports Ethernet (HEC)

Attributes


- Assortment: HDMI Cables
- AWG: 28

- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Standard: Full HD
- Heads: molded
- Packaging: Polybag
- Resolution max.: 1920 x 1200 Pixel, 60Hz
- Wire material: CU
- Length: 10 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	22	14.26	45.00	32.00	25.00	36,000.00
Packaging Unit Inside	1	0.65	5.00	23.00	27.00	3,105.00
Packaging Unit Single	1	0.65	32.00	23.00	2.00	1,472.00
Net single without Packaging	1	0.64	28.00	20.00	5.00	0.00

More images:

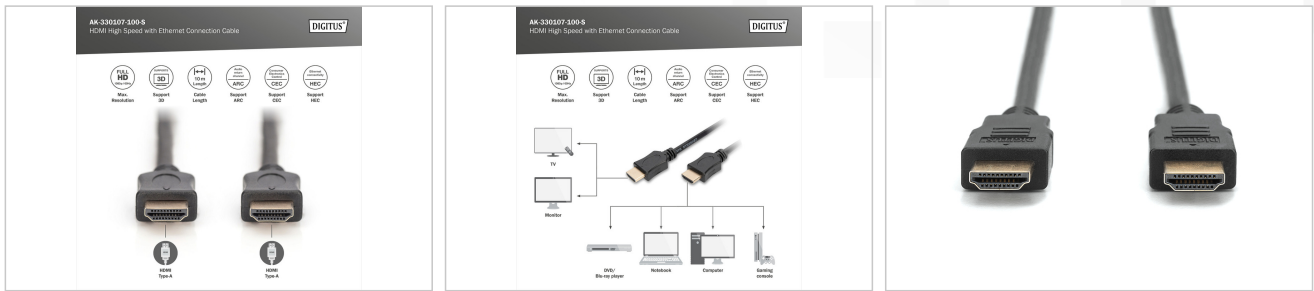

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com