



RAZER SEIREN BT

MASTER GUIDE

With the **Razer Seiren BT**, clarity is wherever you want your content to be. Whether indoors or outdoors, enjoy the freedom to entertain from anywhere as you maintain perfect vocal clarity with a compact Bluetooth microphone ideal for IRL streaming and vlogging.


CONTENTS

1. WHAT'S INSIDE / WHAT'S NEEDED	3
2. LET'S GET YOU COVERED	4
3. TECHNICAL SPECIFICATIONS	5
4. GETTING STARTED.....	6
5. USING THE MICROPHONE	8
6. SAFETY AND MAINTENANCE	11
7. LEGALESE.....	12


1. WHAT'S INSIDE / WHAT'S NEEDED

WHAT'S INSIDE


- Razer Seiren BT

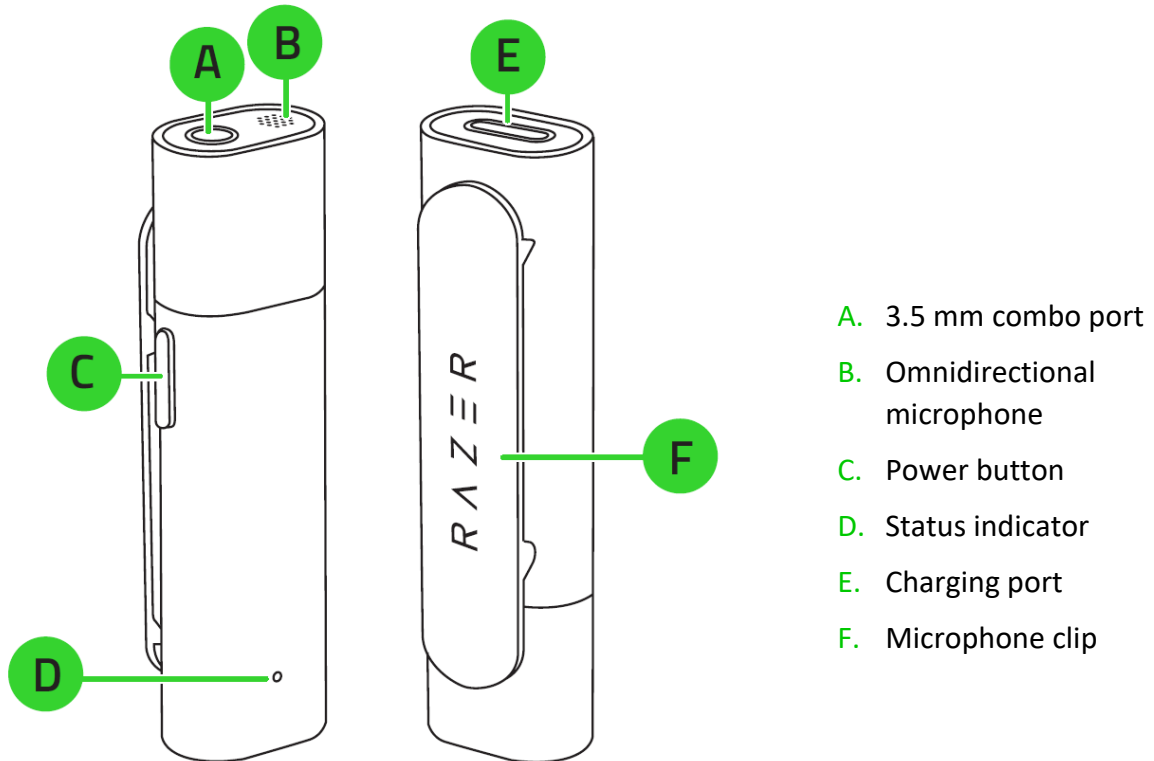

- Type-C to Type-A cable

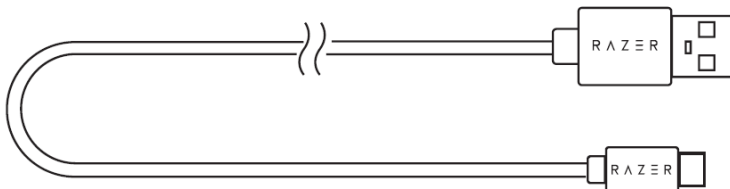

- Foam windsock



- Furry windsock



- Important Product Information Guide

WHAT'S NEEDED

Product requirements


- Devices with Bluetooth audio capability

Razer Streaming app requirements

- iOS 13 / Android 8.1 Oreo (or higher) device with Bluetooth connectivity
- Internet connection for app installation

2. LET'S GET YOU COVERED

You've got a great device in your hands, complete with a 1-year limited warranty coverage. Now maximize its potential and score exclusive Razer benefits by registering at razerid.razer.com

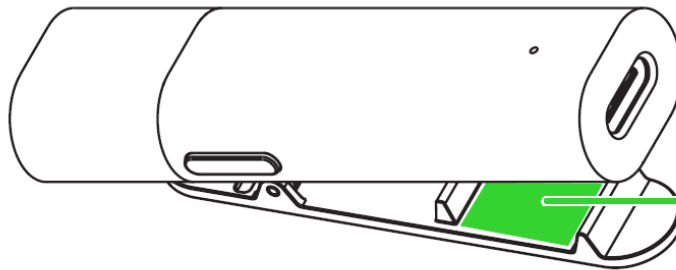

*Your product's
serial number can
be found here.*

Got a question? Ask the Razer Support Team at support.razer.com


3. TECHNICAL SPECIFICATIONS

- Microphone Type: Ø6mm ECM Omnidirectional microphone
- Frequency Response: Supports Bluetooth Wideband Voice
- Recording: mSBC, AI Clarity Technology
- Wireless Connection: Bluetooth 5.2
- Protocol: A2DP, HFP
- Audio Interface: 3.5 mm Jack (Auto detection 3 pole TRS, 4 pole TRRS)
- Full Charge Time: About 1.5 h
- Working Time:
 - About 6h (Bypass Recording Mode)
 - About 4h (AI default Recording Mode)
 - About 11h (A2DP)

4. GETTING STARTED


CHARGING THE MICROPHONE

Connect the Razer Seiren BT to a powered USB-A port using the charging cable. For best results, please fully charge the microphone before using it for the first time. A depleted microphone will fully charge in about 1.5 hours. The status indicator will briefly blink in blue to show that the microphone is now fully charged.

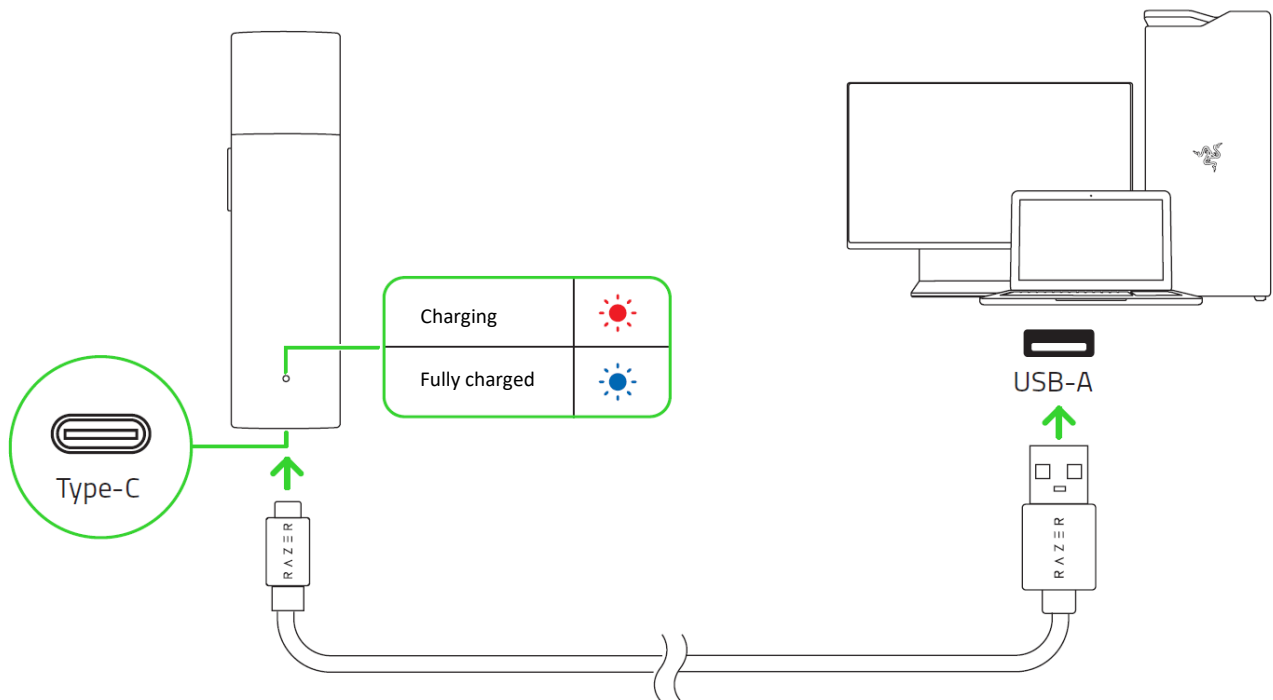


CONNECTING TO THE MICROPHONE

1. For first-time use, press and hold the power button for 2 seconds to power on and activate pairing mode. The status indicator will blink rapidly in blue to show that the microphone is in pairing mode.

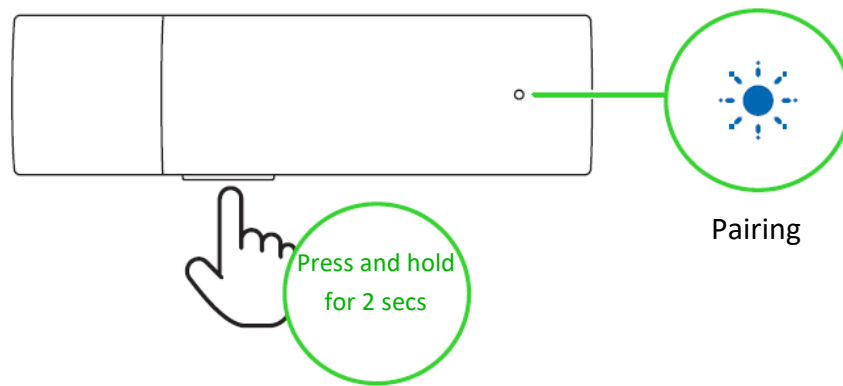

2. Activate Bluetooth on your device and select **Razer Seiren BT** from the list of devices found.
3. Wait until the Razer Seiren BT connects to your device. The status indicator will slowly blink in blue in repeated intervals to show that it is connected to your device.

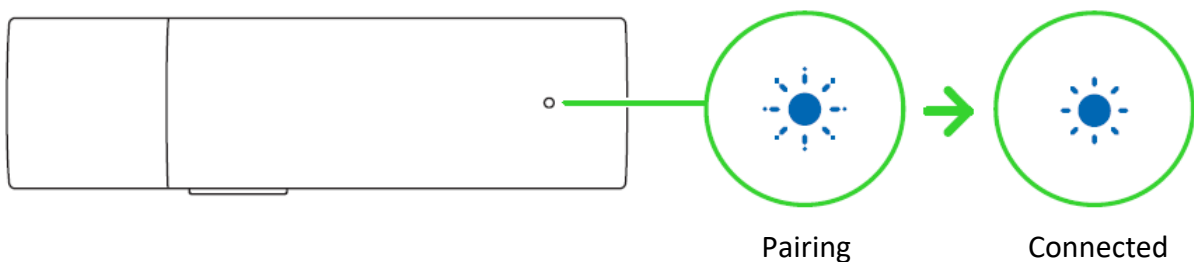

i *Once connected, the Razer Seiren BT will automatically reconnect to the last device whenever on and within range. Keep the devices within close proximity of each other for a faster and more stable connection.*

The Razer Seiren BT is now ready for use!

DOWNLOAD THE RAZER STREAMING APP

Immersing in your IRL streams and vlogs as you make advanced customizations just got a whole lot easier. With the Razer Streaming app, quickly set up and connect to your microphone, adjust mic gain, get the latest app updates, and much more – anytime, anywhere.



Razer Streaming



or


RZR.TO/STREAMING-APP (For
China Only)



5. USING THE MICROPHONE

BATTERY LEVEL



The Razer Seiren BT will briefly show its battery level on the status indicator when you power on the microphone. When the microphone needs recharging, the status indicator shows the battery level until you charge the microphone.

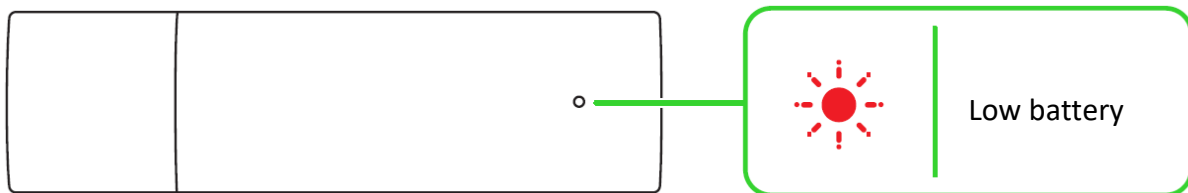

POWER BUTTON


Power on / off

Press and hold the Power button for 2 seconds to power on the microphone. To power off, press and hold the power button for 4 seconds. The status indicator will briefly change its color when the microphone is being powered on or off.

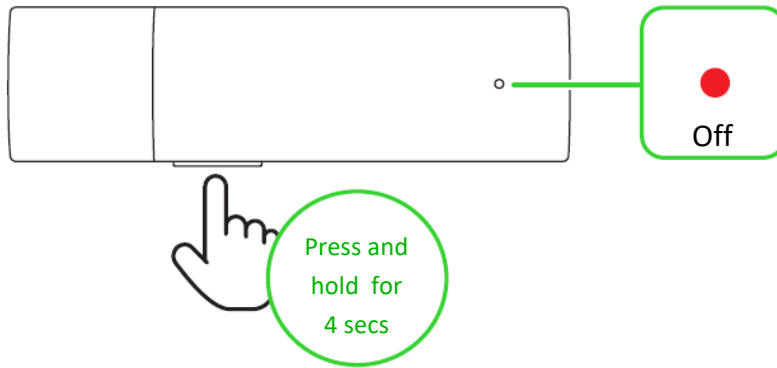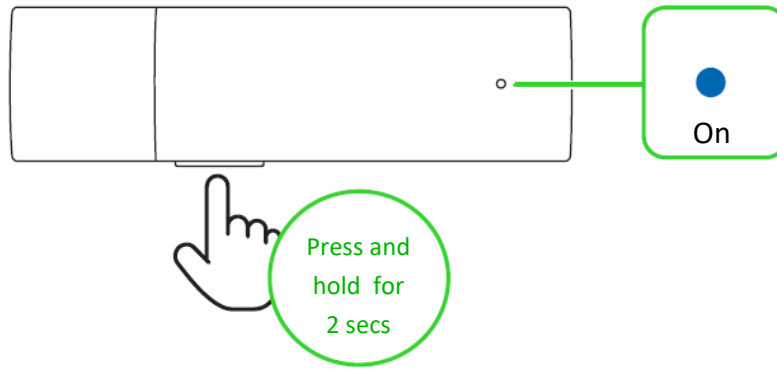

Activate pairing mode

Activate pairing mode if you want to connect the microphone to a different device. While powered off, press and hold the power button for 4 seconds to activate pairing mode, then follow your device's instructions to connect it with the Razer Seiren BT.

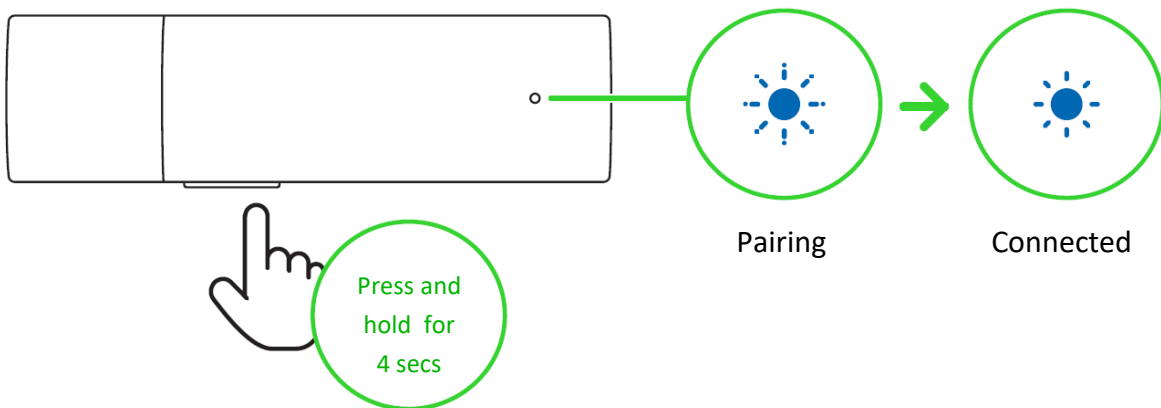


Other functions

Other button functions are available when the microphone is powered on and connected to your device. These functions operate based on your device's current activity and may apply to specific devices.

Single press	Play/pause
	Accept incoming call or end current call
	Put call on-hold and accept incoming call
	End call and swap to on-hold call
Double press	Mute/unmute microphone during call
Press and hold for 2 seconds	Reject incoming call
	Swap calls


3.5 MM COMBO PORT

Connect an audio device (such as an external headset or microphone) to the 3.5 mm combo port to use it as an audio input and/or output source for your Razer Seiren BT while streaming or vlogging.

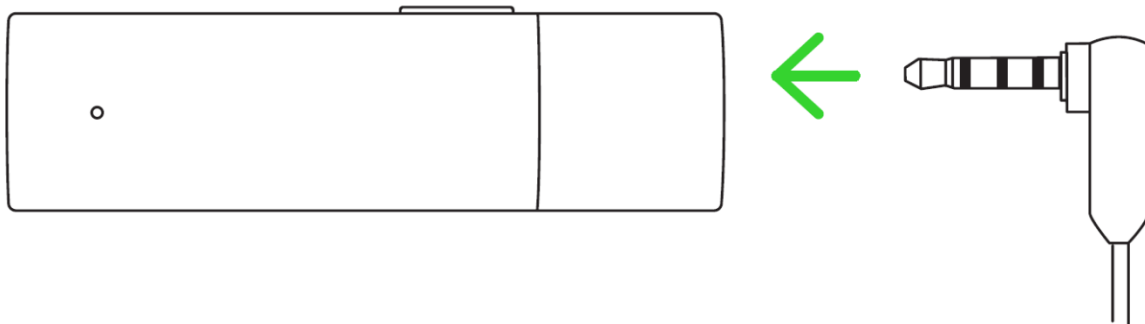

USING THE FOAM / FURRY WINDSOCKS

Switch between the foam and furry windsock to block strong winds, which may cause unwanted noise in your live streams or vlogs. Slipping on the foam windsock onto the microphone when indoors or the furry windsock when using the microphone outdoors will allow your live streams and vlogs to maintain perfect vocal clarity, whether indoors or outdoors.

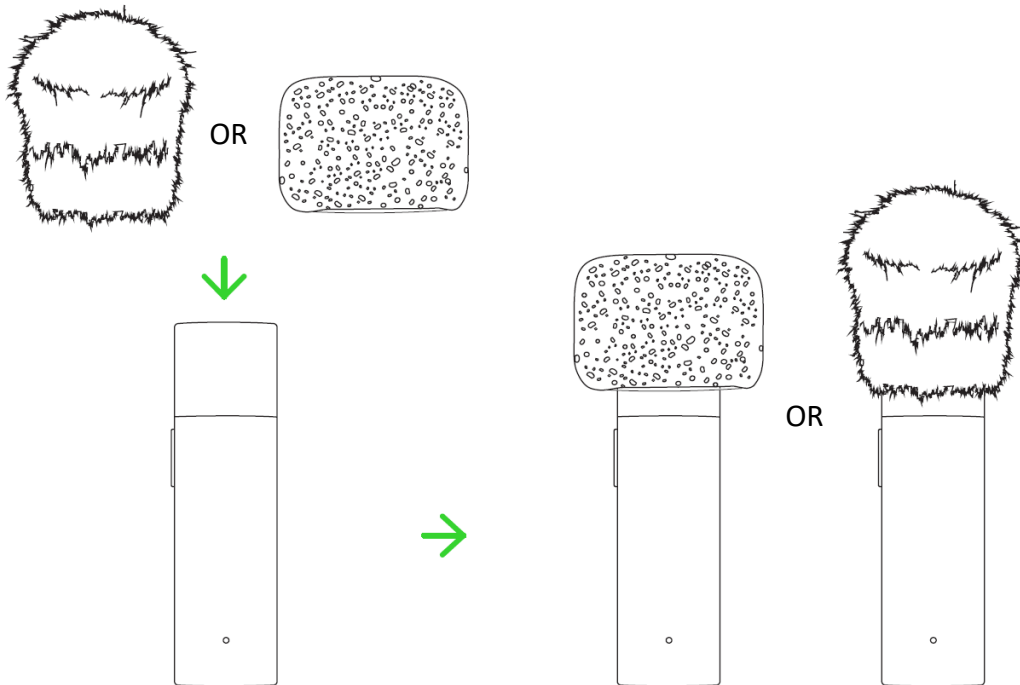

6. SAFETY AND MAINTENANCE

SAFETY GUIDELINES

In order to achieve maximum safety while using your Razer Seiren BT, we suggest that you adopt the following guidelines:

Should you have trouble operating the device properly and troubleshooting does not work, unplug the device (if applicable) and contact the Razer hotline or go to support.razer.com for support.

Do not take apart the device and do not attempt to operate it under abnormal current loads. Doing so will void your warranty.

Do not use or install the device and its components near water, moisture, solvents, or other wet surfaces, nor expose the device to high temperatures or direct sunlight for an extended period of time.

Keep the device away from liquid, humidity or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the device in order to let the temperature stabilize to an optimal level.

MAINTENANCE AND USE

The Razer Seiren BT requires minimum maintenance to keep it in optimum condition. Once a month we recommend you clean it using a soft cloth or cotton swab to prevent dirt buildup. Do not use soap or harsh cleaning agents.

BATTERY WARNING

The Razer Seiren BT contains a Li-ion rechargeable battery. In general, the life expectancy of such batteries is dependent upon usage. If you suspect that the Li-ion rechargeable battery inside the Razer Seiren BT may be drained (has a low charge), try charging it.

Caution: Do not open, mutilate, or expose to conducting materials (metal), moisture, liquid, fire, or heat. Doing so may cause batteries to leak or explode, resulting in personal injury. Battery life varies with usage.

7. LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2022 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, “For Gamers. By Gamers.” and “Razer Chroma” are trademarks or registered trademarks of Razer Inc. and/or affiliated

companies in the United States and other countries. Actual product may differ from pictures. All other trademarks are the property of their respective owners. Warranty not valid outside of product's intended region.

Android, Google, Google Logo, Google Play, and the Google Play logo are registered trademarks of Google LLC.

Apple, the Apple logo, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Razer Inc. ("Razer") may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Seiren BT (the "Product") may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit [razer.com/warranty](https://www.razer.com/warranty).

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.